



RAMA ENERGY CORPORATION

AN ISO 9001:2008 CERTIFIED COMPANY



PWD Approved



GST-09BEMPJ885B1Z6

MANUFACTURER OF ALL TYPES
LIGHTING POLES


Enquiry No.: +91-9807405236

ABOUT US



We take pleasure and pride to introduce ourselves as a leading manufacturer in Pole Lighting SYSTEMS with described below. We are ISO 9001:2015 Certified Company, which provides solutions of your Lighting needs.

We are in this field since 2013 and we have set up of new products like Steel Tubular Poles, Electrical Poles, Solar Street Light Poles, Decorative Poles, Octagonal Poles and High Must Poles. Our products are approved by different Government Organizations like **PVVNL, DVVNL, NHAI, MCD, PWD** and **GNIDA** etc. Our products are know for their excellent performance, high efficiency and low maintenance.

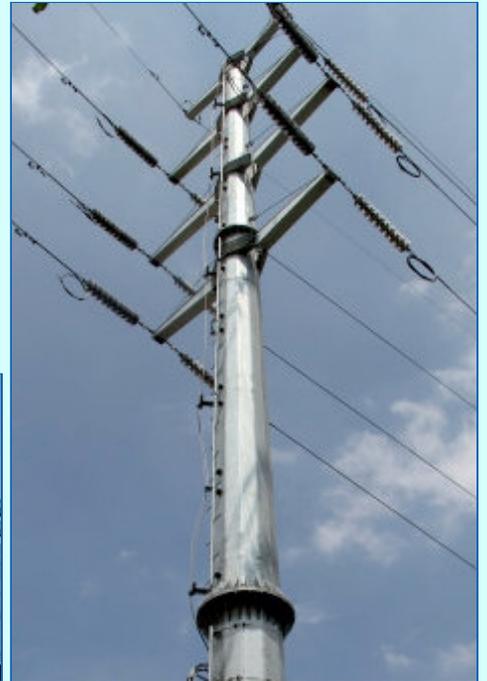

SOLAR STREET LIGHT POLE




SPECIFICATION:

- Pole Height (Ideal): 3 to 8 Meter
- Material: Pre Galvanised, MS with Hot Dip Galvanizing, MS with powder Coating
- Pole Diameter: 76.1mm OD to 139.7mm OD
- Pole Thickness: 2 to 5mm
- Foundation Plate Size: 200/200 to 400/400
- Foundation Plate Thickness: 6mm to 20mm
- Surface Coating: Powder Coated, Painting and Hot Dip galvanizing
- Usage: Garden, Street, Outdoor & Commercial

FEATURES:

- Strong Construction
- Easy to Install
- Rust Resistance
- Best Grade Material Used
- High Durability
- Low Maintenance
- Quality Tested

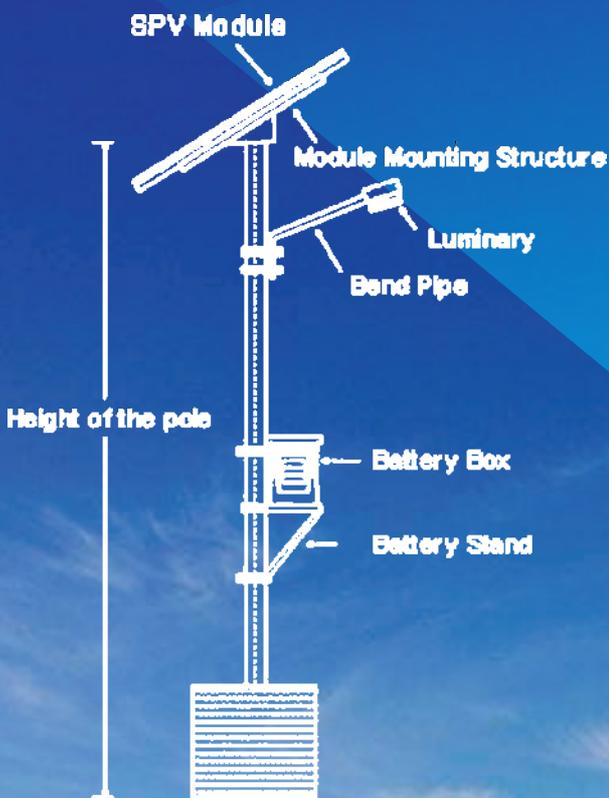

HOT DIP GALVANIZED OCTAGONAL POLES




We are the leading manufacturer of Galvanized Octagonal Poles, which are generally used as Street Lighting Poles. These Poles are fabricated using finest quality raw material and are appreciated for precise dimension and corrosion resistance. We strictly check these Poles at all stages with the help of our expert professionals.

Technical Specification

POLE TYPE	HEIGHT (mtr.)	TOP DIA mm	BOTTOM DIA mm	SHEET THICKNESS	BASE PLATE (L x W x T)	Foundation Bolt (No. x Dia. X mm)
INP3130	3	70	130	3	220X220X12	4X16X600
INP4130	4	70	130	3	220X220X12	4X16X600
INP5130	5	70	130	3	220X220X12	4X16X600
INP5135	5	70	135	3	220X220X12	4X16X600
INP6130	6	70	130	3	220X220X12	4X16X600
INP7130	7	70	130	3	220X220X12	4X20X700
INP7155	7	70	155	3	245X245X12	4X20X700
INP8135	8	70	135	3	220X220X12	4X20X700
INP8155	8	70	155	3	245X245X12	4X20X700
INP9155	9	70	155	3	245X245X16	4X20X700
INP9175	9	70	175	3	275X275X16	4X20X700
INP10155	10	70	155	3	245X245X16	4X24X750
INP10175	10	70	175	3	275X275X16	4X24X750
INP11155	11	70	155	3	245X245X16	4X24X750
INP11175	11	70	175	3	275X275X16	4X24X750
INP12175	12	70	175	3	275X275X16	4X24X750

NOTE:



1. Octagonal Poles can be manufactured for other customized specification.
2. Octagonal Poles have a galvanizing thickness of 65 Microns.
3. Octagonal Poles of length upto 10mtr. Also available in 11&12 mtr. On request in two section.
4. Different types of brackets are available for single, twin and triple luminaries in various design shown and also as per customer requirement.

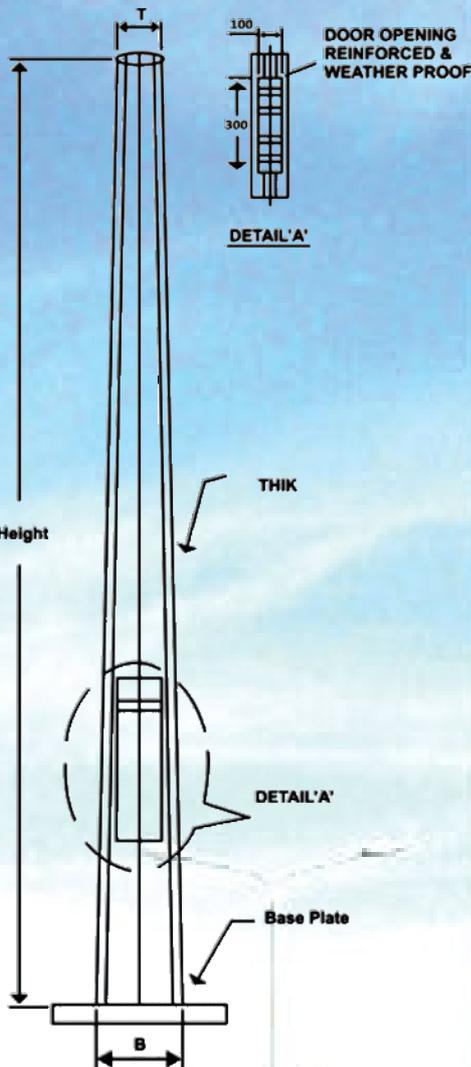

Detailed Information As Per Table



**HOT DIP
GALVANIZED
OCTAGONAL
POLES**

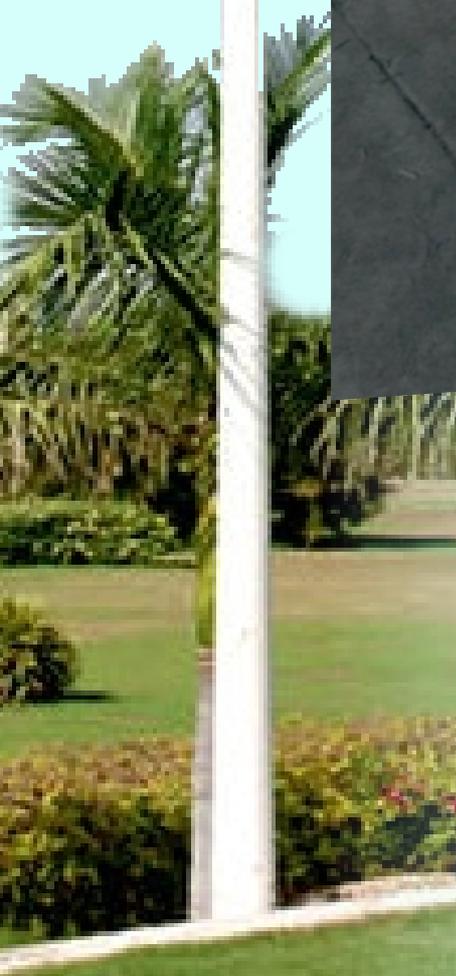
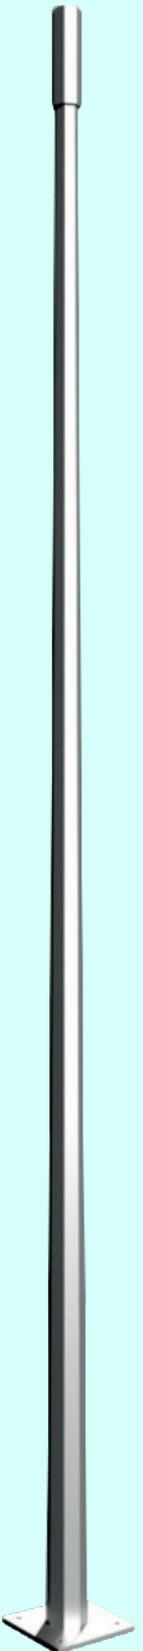


KEY BENEFITS:

- Weighs 50-70% less than comparable concrete structures
- Scope of Customization
- Elongation - up to 85% with no shrinkage

APPLICATION:

- Street Lighting
- Traffic Signals

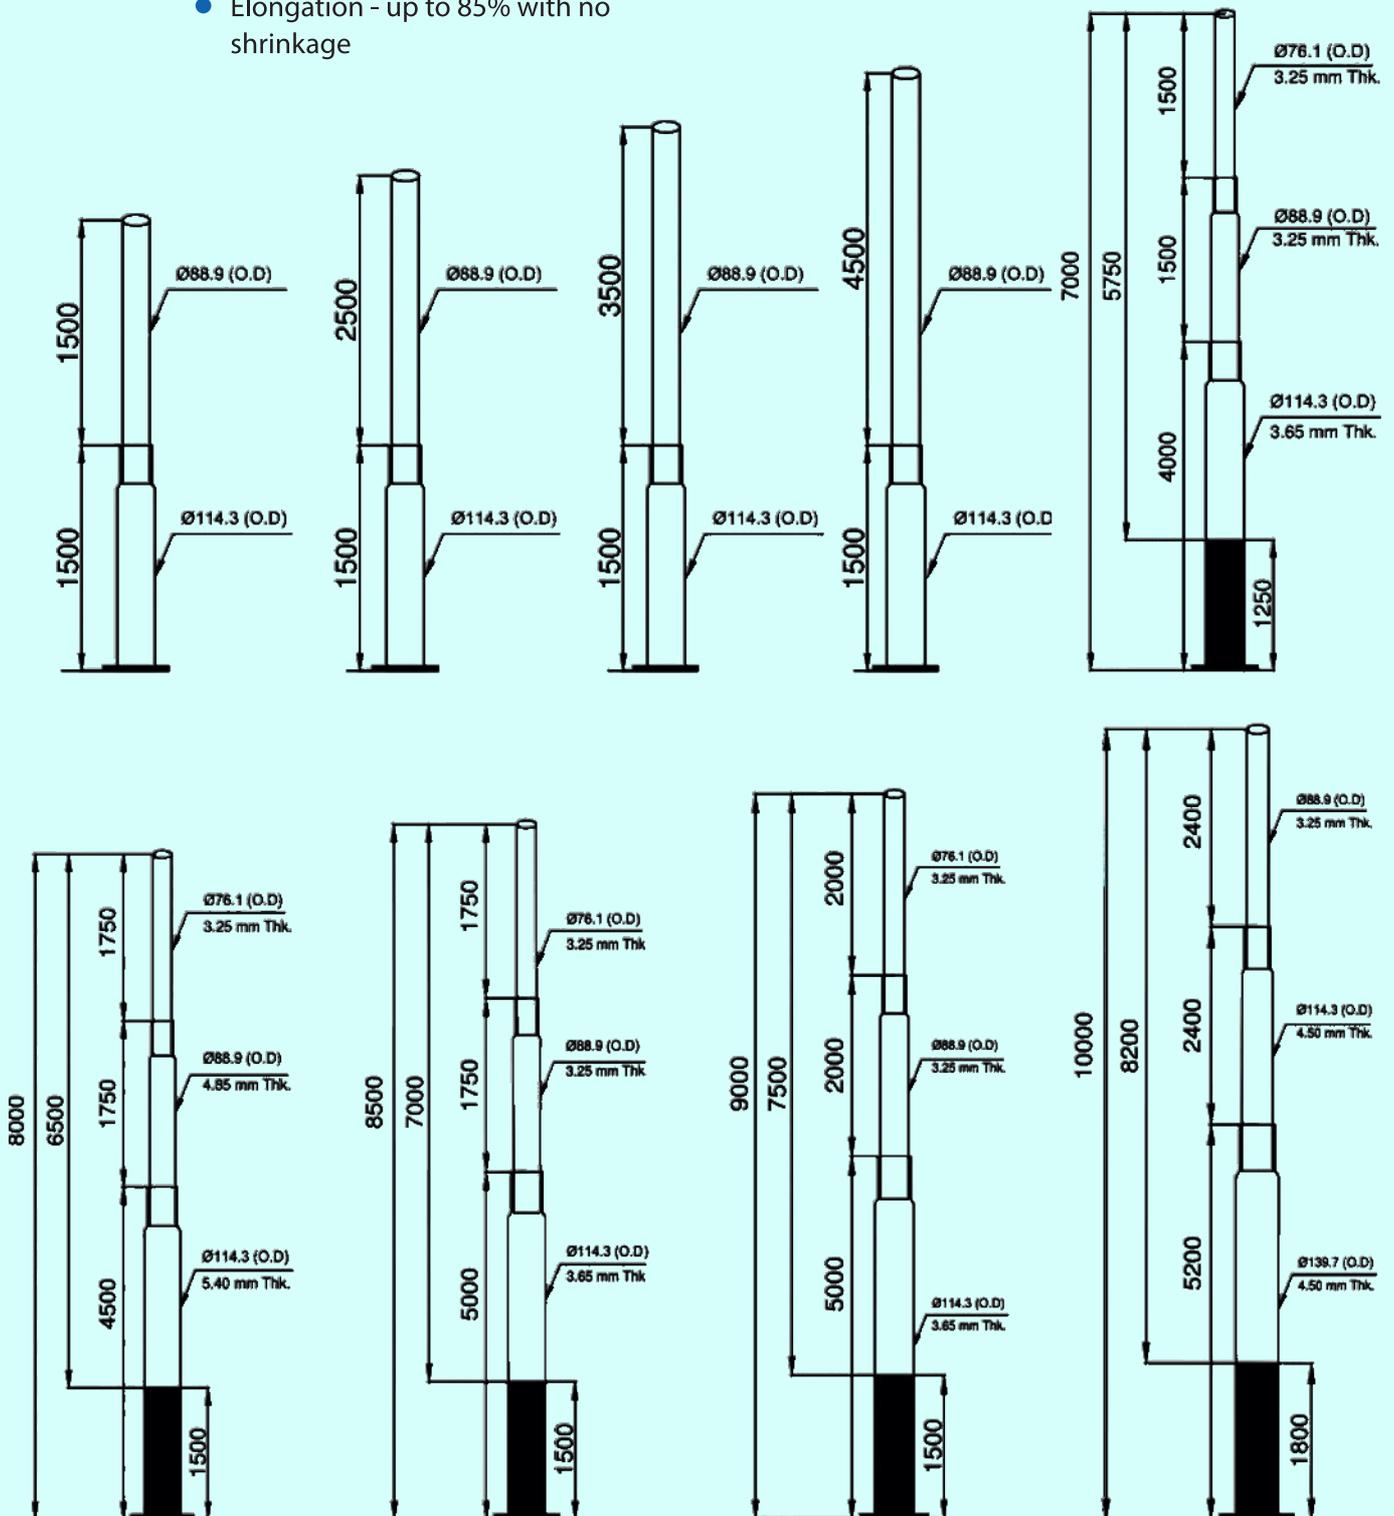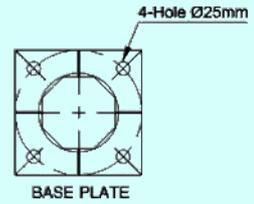

LIGHTING POLES



HIGH MAST POLES



The High Mast with Mobile crown Raising and Lowering gear is designed for the raising and lowering of the luminaries of flood lights mounted brackets to the ground level for maintenance by means of mechanical winch and wire rope arrangement. Bottom shaft is provided with base plate and door opening and middle and top shafts as per the height of the Mast required. High Mast supplied with Laminar ring, Head frame, Centralizing Arm, Stainless Steel Wire Rope, Electrical Cable, Disconnectors, Junction and Distribution Box, Mechanical Winch, Power Tool, Latching (Optional), Pulleys and Top Canopy.



IMPORTANT TECHNICAL FEATURES

FIXED TYPE HEAD FRAME:

Designed with larger Dia. Non corrosive aluminum pulley system for longer life and perfect balancing.

WINCHES:

Winch designed with gear ratio 53:1 and without break of clutches. These are self lubricated for sustained trouble free life.



HIGH MAST FINISH:

The complete mast with component is fully hot dip galvanized for longer life.

LANTERN CARRIAGE:

We specialize in custom built design, standard lighting design and various types and shapes. The lantern carriage is supported with three numbers flexible 6 sq. mm. S.S wire ropes from the distributors that can be elevated or lowered electrically and mechanically.

Technical Detail:-

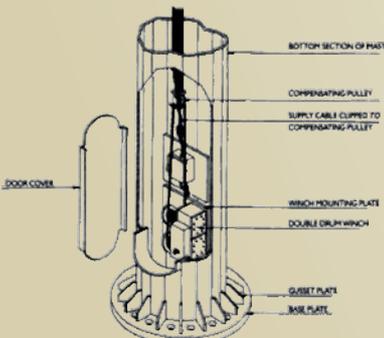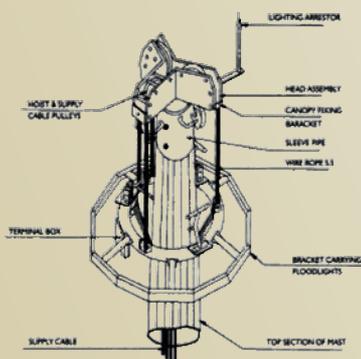


	12 Mtr	16 Mtr	20 Mtr	
1	Material Construction	BSEN 10025 S355	BSEN 10025 S355	BSEN 10025 S355
2	No. of Longitudinal Welds	Single	Single	Single
3	Thickness	3,3mm	4,3mm	4,4mm
4	Individual Length of Section	6175mm	8175mm	10250mm
5	Base & Top Dia	360/150mm	360/150mm	420/200mm
6	Thickness of Galvanization	86 Microns	86 Microns	86 Microns
7	Size of Opening Door	260X900mm	260X900mm	260X900mm
8	Size of Base Plate Diameter	560mm	560mm	620mm
9	Base Plate Thickness	25mm	25mm	32mm
10	No. of Foundation Bolts	6	6	8
11	Bolt Diameter	M25	M28	M28


*may vary as per demand




ELECTRICAL POLES

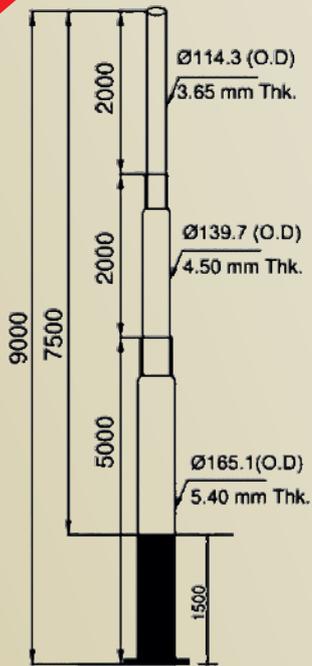



SP-33

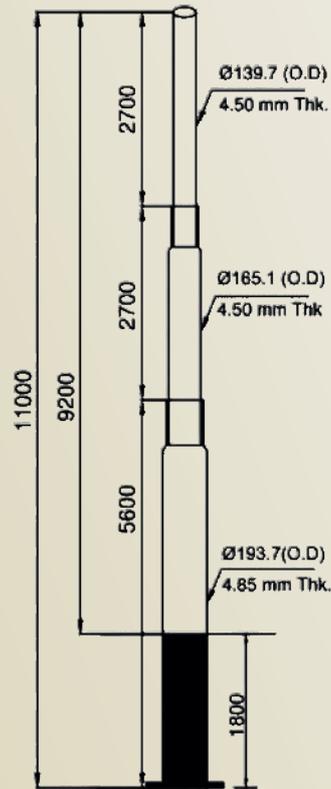

SP-55

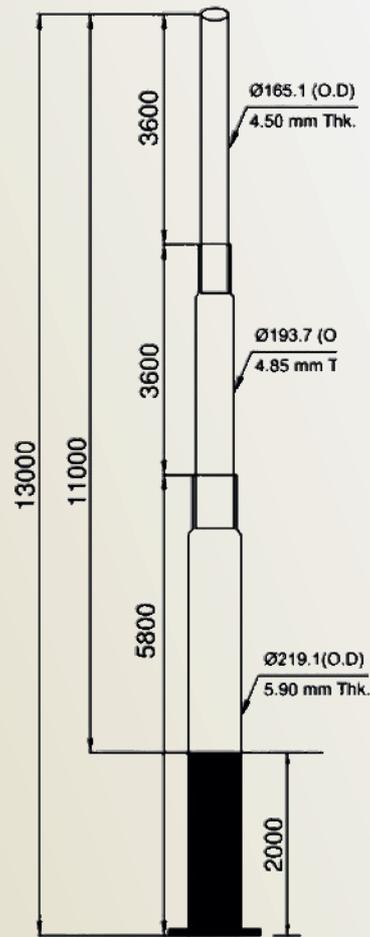

SP-72

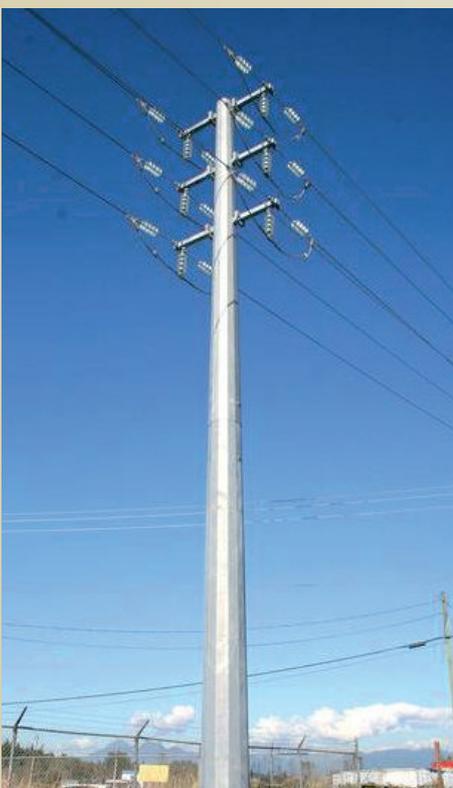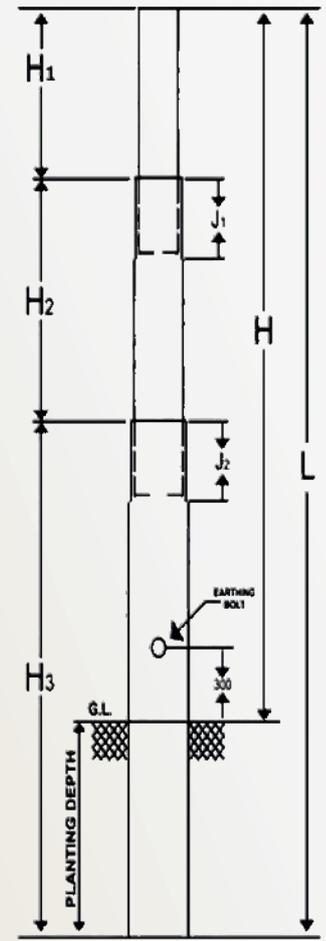

DECORATIVE BRACKETS



SA-01



SA-02



SA-03



SA-04



RING



SA-05



SA-06



SA-07



SA-08

**DECORATIVE
BRACKETS**



DA-01



DA-02



DA-03



DA-04



DA-05



DA-06



CONTACT US

RAMA ENERGY CORPORATION

AN ISO 9001:2008 CERTIFIED COMPANY

Address.: 1/3 T.C Ground Road, Baidyabati, Kolkata (Hooghly)
West Bengal, Pin - 712222

E-mail: mohitjaiswal466@gmail.com, sharadjaiswal19@gmail.com

Office- 6394210672, 8005267336
Enquiry No.: +91-9807405236